


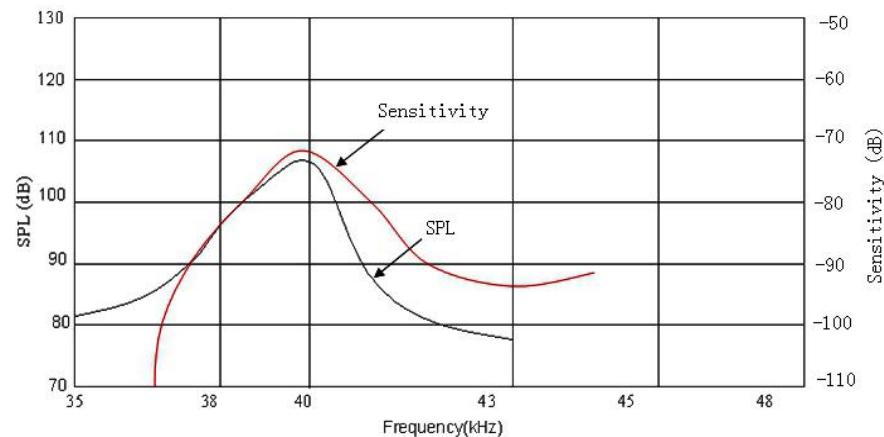


SPECIFICATION		
1	Model No.	EUS10F-40FS-WA
2	Construction	Water proof
3	Using method	dual function (transmitter & receiver)
4	Nominal Frequency	40K
5	Sensitivity(HZ)	≥-80dBV/μMbar
6	S P L(dB)	≥ 92 (10V/30cm/sine wave)
7	Directivity	50deg
8	Capacitance(pF)	2000±25%@1KHz
9	Detectable range(m)	0.3...3
10	Operating Temperature(°C)	-20....+70
11	Housing material	Al
12	Weight(g)	1

THIS DOCUMENT CONTAINS DATE
 PROPRIETARY TO PROJECTS CHANGZHOU ESUNTECH
 CO LTD. ANY USE OR REPRODUCTION,IN ANY FORM,
 WITHOUT PRIOR WRITTEN PERMISSION OF
 PROJECTS CHANGZHOU ESUNTECH CO LTD
 IS PROHIBITED.
 ©2003,Project Changzhou Esuntech Co Ltd

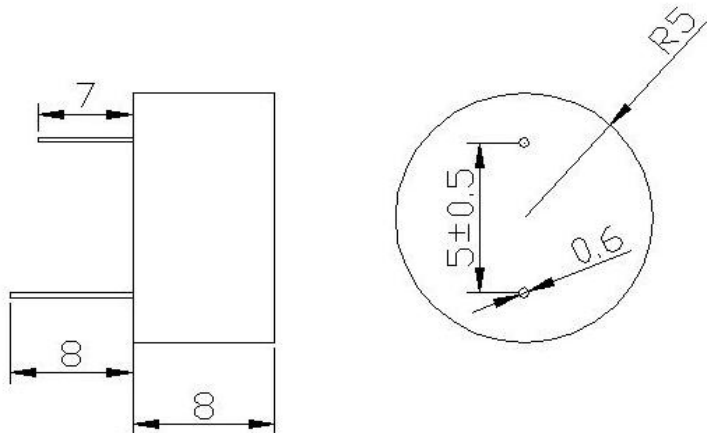


REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	9/23/2003	Y M
A			
B			
C			

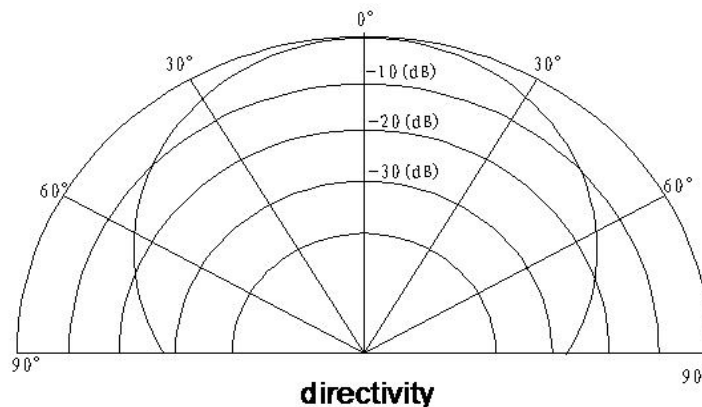

NOTES:

- 1.ALL DIMENSIONS ARE IN MILLIMETERS
- 2.SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SIZE	Designed by	Date	Checked by	Date	Approved by	Date	Drawed date
A4	 Changzhou Esuntech Co.,Ltd http://www.esuntech.com.cn		EUS10F-40FS-WA				
			Ultrasonic Sensor	Edition	Sheet		